Q Series Label Dispenser

Specifications | PTG-Q90 · PTG-Q120 · PTG-Q180

PRIME TECH

Key Features

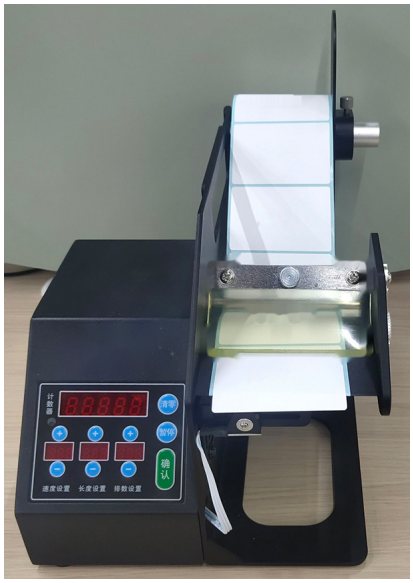

- Automatic Strip
- Count Strip
- Speed Regulation Strip
- Photoelectric Sensor / Fibre Optic Sensor

Specifications

Model	PTG-Q90	PTG-Q120	PTG-Q180
Stripping Speed	1-10 inch/s		
Label Width	8-90 mm	8-120 mm	8-180 mm
Label Length	8-200 mm		
Label Roll Capacity	Maximum outer diameter 220 mm		
Core Diameter	20 mm plus		
Sensor Type	Built-in: photoelectric sensor (non-transparent labels) Optional: fibre optic sensor (transparent / non-transparent labels)		
Label Counter	Automatic counter (single row / multiple row)		
Power	Input: AC 100-240V, 50/60Hz | Output: DC 24V, 20W		
Dimensions (L × W × H)	280 × 230 × 275 mm	280 × 255 × 275 mm	330 × 343 × 245 mm
Carton Size (L × W × H)	350 × 290 × 255 mm	350 × 320 × 255 mm	345 × 405 × 270 mm
Net Weight	Approx. 3.6 kg	Approx. 3.7 kg	Approx. 5.5 kg
Gross Weight	Approx. 4.8 kg	Approx. 5.0 kg	Approx. 6.9 kg
Environment	Temperature: 0-45°C | Relative humidity: 25%-85%		
Certification	CE, FCC, RoHS		
Label Type	Paper/film: coated (copperplate) paper adhesive, synthetic paper, thermal paper, PET/PVC/PP, barcode labels, supervision code labels, security labels and all kinds of flexible film packaging material		